


Catalog

Our Products Range [click below pictures for more details...](#)



















No.	ITEM	PART NO.	DETAIL	PIC.	REF.
<div style="border: 1px solid black; padding: 5px; margin: 10px auto; width: fit-content;"> <p>JPT Series PUSH-IN Terminal Block</p> <ol style="list-style-type: none"> Standard color: Gray, Blue, Orange. Other color and Logo can be customized. Products can be made with Diode. </div>					
1	Push-in Terminal Blocks Color	JPT 1.5/S	500V/17.5A 0.14-1.5mm ² /0.14-1.5mm ² L45/H31/W3.5 mm		End cover: D-JPT1.5/S Plug-in bridge: FBS 10-3.5 Marker strip: ZB 3.5
2	Push-in Terminal Blocks Color	JPT 2.5	800V/31A 0.2-4mm ² /0.2-2.5mm ² L48.5/H35.5/W5.2 mm		End cover: D-JST 2.5 Plug-in bridge: FBS 2-5,3-5, 4-5, 5-5, 10-5 Marker strip: ZB 5
3	Push-in Terminal Blocks Color	JPT 4	800V/41A 0.5-6mm ² /0.5-4mm ² L56/H36.5/W6.2 mm		End cover: D-JST 4 Plug-in bridge: FBS 2-6,3-6, 4-6, 5-6, 10-6 Marker strip: ZB 6
4	Push-in Terminal Blocks Color	JPT 6	1000V/57A 0.5-10mm ² /0.5-6mm ² L57.7/H43.5/W8.2 mm		End cover: D-JPT 6 Plug-in bridge: FBS 2-8,3-8, 4-8, 5-8, 10-8 Marker strip: ZB 8
5	Push-in Terminal Blocks Color	JPT 10	1000V/57A 0.5-16mm ² /0.5-10mm ² L67.7/H49.5/W10.2 mm		End cover: D-JPT 10 Plug-in bridge: FBS 2-10 Marker strip: ZB 10
6	Push-in Terminal Blocks Color	JPT 16	1000V/90A 0.5-25mm ² /0.5-16mm ² L75.4/H52.6/W12.2 mm		End cover: D-JPT 16 Plug-in bridge: FBS 2-12 Marker strip: ZB 10
7	Push-in Twin Terminal Blocks Color	JPT 1.5/S-TW	500V/17.5A 0.14-1.5mm ² /0.14-1.5mm ² L54.5/H30.5/W3.5 mm		End cover: D-JPT 1.5/S-TW Plug-in bridge: FBS 10-3.5 Marker strip: ZB 3.5

8	Push-in Double Terminal Blocks Color 	JPT 1.5/S-QU	500V/17.5A 0.14-1.5mm ² /0.14-1.5mm ² L63.8/H30.5/W3.5 mm		End cover: D-JPT 1.5/S-QU Plug-in bridge: FBS 10-3.5 Marker strip: ZB 3.5
9	Push-in Twin Terminal Blocks Color 	JPT 2.5-TW	800V/31A 0.2-4mm ² /0.2-2.5mm ² L60.5/H36.5/W5.2 mm		End cover: D-JST 2.5-TW Plug-in bridge: FBS 2-5,3-5, 4-5, 5-5, 10-5 Marker strip: ZB 5
10	Push-in Double Terminal Blocks Color 	JPT 2.5-QU	800V/31A 0.2-4mm ² /0.2-2.5mm ² L72.2/H36.5/W5.2 mm		End cover: D-JST 2.5-QU Plug-in bridge: FBS 2-5,3-5, 4-5, 5-5, 10-5 Marker strip: ZB 5
11	Push-in Twin Terminal Blocks Color 	JPT 4-TW	800V/32A 0.2-6mm ² /0.25-4mm ² L66.5/H36.5/W6.2 mm		End cover: D-JPT 4-TW Plug-in bridge: FBS 2-6,3-6, 4-6, 5-6, 10-6 Marker strip: ZB 6
12	Push-in Double Terminal Blocks Color 	JPT 4-QU	800V/32A 0.2-6mm ² /0.25-4mm ² L77/H36.5/W6.2 mm		End cover: D-JPT 4-QU Plug-in bridge: FBS 2-6,3-6, 4-6, 5-6, 10-6 Marker strip: ZB 6
13	 Push-in Double Level Terminal Blocks Color 	JPTTB 1.5/S	500V/16A 0.14-1.5mm ² /0.14-1.5mm ² L77/H36.5/W6.2 mm		End cover: D-JPTTB 1.5 Plug-in bridge: FBS 10-3.5 Marker strip: ZBFM 3.5
14	 Push-in Double Level Terminal Blocks, with equipotential bonder Color 	JPTTB 1.5/S-PV	500V/16A 0.14-1.5mm ² /0.14-1.5mm ² L77/H36.5/W6.2 mm		End cover: D-JPTTB 1.5 Plug-in bridge: FBS 10-3.5 Marker strip: ZBFM 3.5
15	Push-in Double Level Terminal Blocks Color 	JPTTB 2.5	500V/22A 0.14-4mm ² /0.14-2.5mm ² L68.8/H46/W5.2 mm		End cover: D-JPTTB 2.5 Plug-in bridge: FBS 2-5,3-5, 4-5, 5-5, 10-5 Marker strip: ZBFM 5
16	Push-in Double Level Terminal Blocks, with equipotential bonder Color 	JPTTB 2.5-PV	500V/22A 0.14-4mm ² /0.14-2.5mm ² L68.8/H46/W5.2 mm		End cover: D-JPTTB 2.5 Plug-in bridge: FBS 2-5,3-5, 4-5, 5-5, 10-5 Marker strip: ZBFM 5
17	 Push-in Double Level Terminal Blocks Color 	JPTTB 4	500V/32A 0.2-6mm ² /0.2-4mm ² L84.3/H46/W6.2 mm		End cover: D-JPTTB 4 Plug-in bridge: FBS 2-6,3-6, 4-6, 5-6, 10-6 Marker strip: ZBFM 6
18	 Push-in Double Level Terminal Blocks, with equipotential bonder Color 	JPTTB 4-PV	500V/32A 0.2-6mm ² /0.2-4mm ² L84.3/H46/W6.2 mm		End cover: D-JPTTB 4 Plug-in bridge: FBS 2-6,3-6, 4-6, 5-6, 10-6 Marker strip: ZBFM 6
19	Push-in Triple Level Terminal Blocks Color 	JPT 2.5-3L	500V/22A 0.14-4mm ² /0.14-2.5mm ² L102.7/H56.6/W5.2 mm		End cover: D-JPT 2.5-3L Plug-in bridge: FBS 2-5,3-5, 4-5, 5-5, 10-5 Marker strip: ZBFM 5
20	Push-in Triple Level Terminal Blocks, with equipotential bonder Color 	JPT 2.5-3L-PV	500V/22A 0.14-4mm ² /0.14-2.5mm ² L102.7/H56.6/W5.2 mm		End cover: D-JPT 2.5-3L Plug-in bridge: FBS 2-5,3-5, 4-5, 5-5, 10-5 Marker strip: ZBFM 5
21	 Push-in Triple Level Terminal Blocks with bottom layer grounding Color 	JPT2.5-PE/L/N	500V/22A 0.14-4mm ² /0.14-2.5mm ² L102.7/H56.6/W5.2 mm		End cover: D-JPT 2.5-3L Plug-in bridge: FBS 2-5,3-5, 4-5, 5-5, 10-5 Marker strip: ZBFM 5
22	Push-in Ground Terminal Blocks	JPT 1.5-PE	0.14-1.5mm ² /0.14-1.5mm ² L45/H31/W3.5 mm		End cover: D-JPT1.5/S Marker strip: ZB 3.5
23	Push-in Ground Terminal Blocks	JPT 2.5-PE	0.2-4mm ² /0.2-2.5mm ² L48.5/H35.5/W5.2 mm		End cover: D-JST 2.5 Marker strip: ZB 5
24	Push-in Ground Terminal Blocks	JPT 4-PE	0.5-6mm ² /0.5-4mm ² L56/H36.5/W6.2 mm		End cover: D-JST 4 Marker strip: ZB 6
25	Push-in Ground Terminal Blocks	JPT 6-PE	0.5-10mm ² /0.5-6mm ² L57.7/H43.5/W8.2 mm		End cover: D-JPT 6 Marker strip: ZB 8
26	Push-in Ground Terminal Blocks	JPT 10-PE	0.5-16mm ² /0.5-10mm ² L67.7/H49.5/W10.2 mm		End cover: D-JPT 10 Marker strip: ZB 10
27	 Push-in Ground Terminal Blocks	JPT 16-PE	0.5-25mm ² /0.5-16mm ² L75.4/H52.6/W12.2 mm		End cover: D-JPT 16 Marker strip: ZB 10
28	Push-in Ground Twin Terminal Blocks	JPT 1.5/S-TW-PE	0.14-1.5mm ² /0.14-1.5mm ² L54.5/H30.5/W3.5 mm		End cover: D-JPT 1.5/S-TW Marker strip: ZB 3.5
29	Push-in Ground Double Terminal Blocks	JPT 1.5/S-QU-PE	0.14-1.5mm ² /0.14-1.5mm ² L63.8/H30.5/W3.5 mm		End cover: D-JPT 1.5/S-QU Marker strip: ZB 3.5

30	Push-in Ground Twin Terminal Blocks	JPT 2.5-TW-PE	0.2-4mm ² /0.2-2.5mm ² L60.5/H36.5/W5.2 mm		End cover: D-JST 2.5-TW Marker strip: ZB 5
31	Push-in Ground Double Terminal Blocks	JPT 2.5-QU-PE	0.2-4mm ² /0.2-2.5mm ² L72.2/H36.5/W5.2 mm		End cover: D-JST 2.5-QU Marker strip: ZB 5
32	Push-in Ground Twin Terminal Blocks	JPT 4-TW-PE	0.2-6mm ² /0.25-4mm ² L66.5/H36.5/W6.2 mm		End cover: D-JPT 4-TW Marker strip: ZB 6
33	Push-in Ground Double Terminal Blocks	JPT 4-QU-PE	0.2-6mm ² /0.25-4mm ² L77/H36.5/W6.2 mm		End cover: D-JPT 4-QU Marker strip: ZB 6
34	 Push-in Ground Double Level Terminal Blocks	JPTTB 1.5-PE	0.14-1.5mm ² /0.14-1.5mm ² L77/H36.5/W6.2 mm		End cover: D-JPTTB 1.5 Marker strip: ZBFM 3.5
35	Push-in Ground Double Level Terminal Blocks	JPTTB 2.5-PE	0.14-4mm ² /0.14-2.5mm ² L68.8/H46/W5.2 mm		End cover: D-JPTTB 2.5 Marker strip: ZBFM 5
36	Push-in Ground Double Level Terminal Blocks	JPTTB 4-PE	0.2-6mm ² /0.2-4mm ² L68.8/H46/W5.2 mm		End cover: D-JPTTB 4 Marker strip: ZBFM 6
37	Push-in Ground Triple Level Terminal Blocks	JPT 2.5-3L-PE	0.14-4mm ² /0.14-2.5mm ² L102.7/H56.6/W5.2 mm		End cover: D-JPT 2.5-3L Marker strip: ZBFM 5
38	End Cover	D-JPT 1.5/S	L45/H24.6/W2.2mm		Match with: JPT 1.5/S
39	End Cover	D-JPT 1.5/S-TW	L54.5/H24.6/W2.2mm		Match with: JPT 1.5/S-TW
40	End Cover	D-JPT 1.5/S-QU	L63.8/H24.6/W2.2mm		Match with: JPT 1.5/S-QU
41	End Cover	D-JPT 4-TW	L77/H29/W2.2mm		Match with: JPT 4-TW
42	End Cover	D-JPT 4-QU	L56/H29/W2.2mm		Match with: JPT 4-QU
43	End Cover	D-JPTTB 1.5/S	L65.7/H40.5/W1.9mm		Match with: JPTTB 1.5/S
44	End Cover	D-JPTTB 2.5	L68.8/H40/W2.2mm		Match with: JPTTB 2.5
45	End Cover	D-JPTTB 4	L83.6/H40.1/W2mm		Match with: JPTTB 4
46	End Cover	D-JPT 6	L57.7/H36/W2.2 mm		Match with: JPT 6
47	End Cover	D-JPT 10	L67.7/H42.6/W2.2 mm		Match with: JPT 10
48	End Cover	D-JPT 16	L75.4/H45.6/W/2.2 mm		Match with: JPT 16
49	End Cover	D-JPT 2.5-3L	L103/H51/W2 mm		Match with: JPT 2.5-3L
50	 Smaller Partition Plate	ATP-JST/JPT-S	L70/H38.6/W0.8 mm		Match with: JPT 1.5/S, JPT 1.5/S-TW, JPT 1.5/S-QU, JPT 2.5, JPT 2.5-TW, JPT4, JPT 4-TW, JST 1.5, JST 2.5, JST 2.5-TW, JST 4-TW
51	Partition Plate	ATP-JST/JPT	L98.5/H50.7/W0.8 mm		Match with JPT, JST Series 

52	Plug-in Bridge 10 Seats	FBS 10-3.5	L33.7/H18.5W3.5mm		Match with: JPT 1.5/S JPT 1.5/S-TW JPT 1.5/S-QU
53	Other detail list of FBS bridges in JST series, other detail list of ZB marker strips in JUK series.				
54	Plug-in Bridge, 2位	FBS 2-3.5			
55	Plug-in Bridge, 3位	FBS 3-3.5			
56	Plug-in Bridge, 5位	FBS 5-3.5			
57	Push-in Triple Level Terminal Blocks	JPT 1.5/S-3L			
58	Push-in Triple Level Ground Terminal Blocks	JPT 1.5/S-3L-PE			
59	Push-in Terminal Blocks	JPT 6-TW			
60	Push-in Terminal Blocks	JPT 6-QU			
61	Push-in FUSE Terminal Blocks	JPT 4-HESI			
62	Push-in Ground Twin Terminal	JPT 6-TW-PE			
63	Push-in Ground Double Terminal	JPT 6-QU-PE			
64	Push-in TEST Terminal Blocks				
65	Push-in Connection Relay base (No plug-in relay)	JBPT1.5	250V AC/DC /8A 0.14-1.5mm ² /0.14-1.5mm ² L78/H93/W6.2 mm		Plug-in bridge: FBS 2-6,3-6, 4-6, 5-6, 10-6 Marker strip: ZB 6
66	Push-in Connection Relay Module with plug-in miniature relay Available in 5V, 12V, 24V	JBPT1.5	250V AC/DC /8A 0.14-1.5mm ² /0.14-1.5mm ² L78/H93/W6.2 mm		Plug-in bridge: FBS 2-6,3-6, 4-6, 5-6, 10-6 Marker strip: ZB 6
<p>JST Series Spring Cage Terminal Block</p> <ol style="list-style-type: none"> Standard color: Gray, Blue, Orange. Other color and Logo can be customized. Products can be made with Diode. <p>Spring cage connection Diode</p>					
67	Spring-cage Terminal Blocks Color	JST 1.5	500V/17.5A 0.14-1.5mm ² /0.14-1.5mm ² L49/H36/W4.2 mm		End cover: D-JST 1.5-2.5 Plug-in bridge: FBS 10-4 Marker strip: ZB 4
68	Spring-cage Terminal Blocks Color	JST 2.5	800V/31A 0.2-4mm ² /0.2-2.5mm ² L49/H35.5/W5.2 mm		End cover: D-JST 1.5-2.5 Plug-in bridge: FBS 2-5,3-5, 4-5, 5-5, 10-5 Marker strip: ZB 5
69	Spring-cage Terminal Blocks Color	JST 4	800V/41A 0.5-6mm ² /0.5-4mm ² L56.5/H35.5/W6.2 mm		End cover: D-JST 4 Plug-in bridge: FBS 2-6,3-6, 4-6, 5-6, 10-6 Marker strip: ZB 6
70	Spring-cage Terminal Blocks Color	JST 6	800V/57A 0.5-10mm ² /0.5-6mm ² L70/H43/W8.2 mm		End cover: D-JST 6 Plug-in bridge: FBS 2-8,3-8, 4-8, 5-8, 10-8 Marker strip: ZB 8
71	Spring-cage Terminal Blocks Color	JST 10	1000V/57A 0.5-16mm ² /0.5-10mm ² L71.5/H49.5/W10.2 mm		End cover: D-JST 10 Plug-in bridge: FBS 2-10 Marker strip: ZB 10
72	Spring-cage Twin Terminal Blocks Color	JST 2.5-TW	800V/31*A 0.2-4mm ² /0.2-2.5mm ² L61/H36/W5.2 mm		End cover: D-JST 2.5-TW Plug-in bridge: FBS 2-5,3-5, 4-5, 5-5, 10-5 Marker strip: ZB 5
73	Spring-cage Twin Terminal Blocks Color	JST 4-TW	800V/32*A 0.5-6mm ² /0.5-4mm ² L71.5/H36.5/W6.2 mm		End cover: D-JST 4-TW Plug-in bridge: FBS 2-6,3-6, 4-6, 5-6, 10-6 Marker strip: ZB 6
74	Spring-cage Double Terminal Blocks Color	JST 2.5-QU	800V/30*A 0.2-4mm ² /0.2-2.5mm ² L72.5/H35.5/W5.2 mm		End cover: D-JST 2.5-QU Plug-in bridge: FBS 2-5,3-5, 4-5, 5-5, 10-5 Marker strip: ZB 5
75	Spring-cage Double Terminal Blocks Color	JST 4-QU	800V/40*A 0.5-6mm ² /0.5-4mm ² L87/H36/W6.2 mm		End cover: D-JST 4-QU Plug-in bridge: FBS 2-6,3-6, 4-6, 5-6, 10-6 Marker strip: ZB 6
76	Spring-cage Double Level Terminal Blocks Color	JSTTB 2.5	500V/24A 0.2-4mm ² /0.2-2.5mm ² L68/H46/W5.2 mm		End cover: D-JSTTB 2.5 Plug-in bridge: FBS 2-5,3-5, 4-5, 5-5, 10-5 Marker strip: ZBFM 5
77	Spring-cage Double Level Terminal Blocks, with equipotential bonder Color	JSTTB 2.5-PV	500V/24A 0.2-4mm ² /0.2-2.5mm ² L68/H46/W5.2 mm		End cover: D-JSTTB 2.5 Plug-in bridge: FBS 2-5,3-5, 4-5, 5-5, 10-5 Marker strip: ZBFM 5

78	new Spring-cage Double Level Terminal Blocks Color 	JSTTB 4	500V/32A 0.08-6mm ² /0.08-4mm ² L84.4/H46.3/W6.2 mm		End cover: D-JSTTB 4 Plug-in bridge: FBS 2-6, 3-6, 4-6, 5-6, 10-6 Marker strip: ZBFM 6
79	new Spring-cage Double Level Terminal Blocks, with equipotential bonder Color 	JSTTB 4-PV	500V/32A 0.08-6mm ² /0.08-4mm ² L84.4/H46.3/W6.2 mm		End cover: D-JSTTB 2.5 Plug-in bridge: FBS 2-5,3-5, 4-5, 5-5, 10-5 Marker strip: ZBFM 6
80	Spring-cage Three Level Terminal Blocks Color 	JST 2.5-3L	500V/28A 0.2-4mm ² /0.2-2.5mm ² L99.5/H57/W5.2 mm		End cover: D-JST 2.5-3L Plug-in bridge: FBS 2-5,3-5, 4-5, 5-5, 10-5 Marker strip: ZBFM 5
81	Spring-cage Three Level Terminal Blocks, with equipotential bonder Color 	JST 2.5-3L-PV	500V/28A 0.2-4mm ² /0.2-2.5mm ² L99.5/H57/W5.2 mm		End cover: D-JST 2.5-3L Plug-in bridge: FBS 2-5,3-5, 4-5, 5-5, 10-5 Marker strip: ZBFM 5
82	Spring-cage Three Level Terminal Blocks	JDL D 2.5-3VN	500V/20A 0.2-4mm ² /0.2-2.5mm ² L110.5/H69.5/W5.2 mm		End cover: D-JDL D 2.5-3VN
83	Fuse Terminal Blocks With Disconnect Lever Color 	JST 4-HESI	500V6.3A 0.08-6mm ² /0.8-4mm ² L61.5/H62.5/W5.2 mm		Plug-in bridge: FBS 2-6,3-6, 4-6, 5-6,10-6 Marker strip: ZB 8 Extra fee for fuse: \$0.024 0.5, 1, 2,3, 4, 5 ,6, 8, 10A, etc
84	Fuse Terminal Blocks With Disconnect Lever with LED Color 	JST 4-HESILED	500V6.3A 0.08-6mm ² /0.8-4mm ² L61.5/H62.5/W5.2 mm		Plug-in bridge: FBS 2-6,3-6, 4-6, 5-6,10-6 Marker strip: ZB 8 Extra fee for fuse: \$0.024 0.5, 1, 2,3, 4, 5 ,6, 8, 10A, etc LED: 24VDC,230VAC
85	new Knife Disconnect Terminal Blocks	JST 4-MT	400V/20A 0.08-6mm ² /0.08-4mm ² L61.5/H36.5/W6.2 mm		Plug-in bridge: FBS 2-5, 3-5, 4-5, 5-5, 10-5 Marker strip: ZB 6
86	Spring-cage Ground Terminal Blocks	JST 1.5-PE	500V/17.5A 0.14-1.5mm ² /0.14-1.5mm ² L49.2/H36/W4.2 mm		End cover: D-JST 1.5-2.5 Marker strip: ZB 4
87	Spring-cage Ground Terminal Blocks	JST 2.5-PE	800V/31A 0.2-4mm ² /0.2-2.5mm ² L49/H35.5/W5.2 mm		End cover: D-JST 2.5 Marker strip: ZB 5
88	Spring-cage Ground Terminal Blocks	JST 4-PE	800V/41A 0.5-6mm ² /0.5-4mm ² L56.5/H35.5/W6.2 mm		End cover: D-JST 4 Marker strip: ZB 6
89	Spring-cage Ground Terminal Blocks	JST 6-PE	800V/57A 0.5-10mm ² /0.5-6mm ² L70/H43/W8.2 mm		End cover: D-JST 6 Marker strip: ZB 8
90	Spring-cage Ground Terminal Blocks	JST 10-PE	1000V/57A 0.5-16mm ² /0.5-10mm ² L71.5/H49.5/W10.2 mm		End cover: D-JST 10 Marker strip: ZB 10
91	Spring-cage Twin Ground Terminal Blocks	JST 2.5-TW-PE	800V/31*A 0.2-4mm ² /0.2-2.5mm ² L61/H36/W5.2 mm		End cover: D-JST 2.5-TW Marker strip: ZB 5
92	Spring-cage Twin Ground Terminal Blocks	JST 4-TW-PE	800V/41*A 0.5-6mm ² /0.5-4mm ² L71.5/H36.5/W6.2 mm		End cover: D-JST 4-TW Marker strip: ZB 6
93	Spring-cage Double Ground Terminal Blocks	JST 2.5-QU-PE	800V/30*A 0.2-4mm ² /0.2-2.5mm ² L72.5/H35.5/W5.2 mm		End cover: D-JST 2.5-QU Marker strip: ZB 5
94	Spring-cage Double Ground Terminal Blocks	JST 4-QU-PE	800V/40*A 0.5-6mm ² /0.5-4mm ² L87/H36/W6.2 mm		End cover: D-JST 4-QU Marker strip: ZB 6
95	Spring-cage Two Level Ground Terminal Blocks	JSTTB 2.5-PE	500V/24A 0.2-4mm ² /0.2-2.5mm ² L68/H46/W5.2 mm		End cover: D-JSTTB 2.5 Marker strip: ZBFM 5
96	new Spring-cage Two Level Ground Terminal Blocks	JSTTB 4-PE	500V/32A 0.08-6mm ² /0.08-4mm ² L84.4/H46.3/W6.2 mm		End cover: D-JSTTB 4 Marker strip: ZBFM 6
97	End Cover	D-JST 1.5-2.5	L49.2/H30/W2.2 mm		Match with: JST 1.5, JST 2.5
98	End Cover	D-JST 4	L56.5/H30/W2.2 mm		Match with: JST 4

99	End Cover	D-JST 6	L70/H36.6/W2.2 mm		Match with: JST 6
100	End Cover	D-JST 10	L71.5/H43/W2.3 mm		Match with: JST 10
101	End Cover	D-JST2.5-TW	L61/H29.5/W2.2 mm		Match with: JST 2.5-TW
102	End Cover	D-JST2.5-QU	L72/H29.5/W2.2 mm		Match with: JST 2.5-QU
103	End Cover	D-JST4-TW	L72/H29.4/W2.2 mm		Match with: JST 4-TW
104	End Cover	D-JST4-QU	L87.5/H29.6/W2.2 mm		Match with: JST 4-QU
105	End Cover	D-JSTTB 2.5	L68/H40/W2.2 mm		Match with: JSTTB 2.5
106	End Cover	D-JSTTB 4	L84.5/H40.1/W2 mm		Match with: JSTTB 4
107	End Cover	D-JST2.5-3L	L99/H51/W2.2 mm		Match with: JST 2.5-3L
108	End Cover	D-JDL2.5-3VN	L109.7/H57.6/W1.5 mm		Match with: JDL2.5-3VN
109	Plug-in Bridge 10 Seats	FBS 10-4	L41/H22.6/W3.4 mm		Bridge for : JST 1.5
110	Plug-in Bridge, 2 seats	FBS 2-5	L11/H22.8/W3.1 mm		Bridge for: JST/JPT 2.5 JST/JPT 2.5-TW JST/JPT 2.5-QU JSTTB/JPTTB 2.5 JST/JPT 2.5-3L
111	Plug-in Bridge, 3 seats	FBS 3-5	L14.2/H22.8/W3.1 mm		
112	Plug-in Bridge, 4 seats	FBS 4-5	L20.6/H22.8/W3.1 mm		
113	Plug-in Bridge, 5 seats	FBS 5-5	L24.7/H22.8/W3.1 mm		
114	Plug-in Bridge, 10 seats	FBS 10-5	L50.6/H22.8/W3.1 mm		
115	Plug-in Bridge, 2 seats	FBS 2-6	L11/H22.8/W3.1 mm		Bridge for: JST/JPT 4 JST/JPT 4-TW JST/JPT 4-QU
116	Plug-in Bridge, 3 seats	FBS 3-6	L12.1/H22.8/W3.1 mm		
117	Plug-in Bridge, 4 seats	FBS 4-6	L23.3/H22.8/W3.1 mm		
118	Plug-in Bridge, 5 seats	FBS 5-6	L30.5/H22.8/W3.1 mm		
119	Plug-in Bridge, 10 seats	FBS 10-6	L60.1/H22.8/W3.1 mm		
120	Plug-in Bridge, 2 seats	FBS 2-8	L14.8/H30.8/W3.3 mm		Bridge for : JST/JPT 6
121	Plug-in Bridge, 3 seats	FBS 3-8	L23/H30.8/W3.3 mm		
122	Plug-in Bridge, 4 seats	FBS 4-8	L31.2/H30.8/W3.3 mm		
123	Plug-in Bridge, 5 seats	FBS 5-8	L40.5/H30.8/W3.3 mm		
124	Plug-in Bridge, 10 seats	FBS 10-8	L80.4/H30.8/W3.3 mm		
125	Plug-in Bridge, 2 seats	FBS 2-10	L18/H35.1/W4.2 mm		Bridge for: JST/JPT 10
126	Plug-in Bridge, 2 seats	FBS 2-12	L20.5/H35.8/W5.3 mm		Bridge for: JST/JPT 16
127	Plug-in Bridge, 2 seats	FBS 2-16	L25.4/H43.6/W5.8 mm		Bridge for: JST/JPT/JUT 35
128	Spring-cage Twin Terminal	JST 1.5-TW			
129	Spring-cage Double Terminal Blocks	JST 1.5-QU			
130	Spring-cage Twin Terminal	JST 6-TW			



Coming soon































131	Spring-cage Double Terminal Blocks	JST 6-QU
132	Spring-cage Terminal Blocks	JST 16
133	Spring-cage Terminal Blocks	JST 35














JUK Series Screw Terminal Block

- Standard color: Gray, Black, Blue, Yellow, Green, Red.
- Other color and Logo can be customized.
- Products can be made with Diode.










134	Universal Terminal Blocks Color 	JUK 1.5N	690V/17.5A 0.14-1.5mm ² /0.14-1.5mm ² L42.5/H41/W4.2 mm		End cover: D-JUK 1.5 Fixed bridge: JFBI 10-4 Insertion bridge : JEB 10-4 Marker strips: ZB 4
135	Universal Terminal Blocks Color 	JUK 2.5B	800V/32A 0.2-4mm ² /0.2-2.5mm ² L42.5/H41/W6.2 mm		End cover: D-JUK 2.5 Fixed bridge: JFBI 10-6 Insertion bridge : JEB 10-6 Marker strips: ZB6
136	Universal Terminal Blocks Color 	JUK 3N	800V/32A 0.2-4mm ² /0.2-2.5mm ² L42.5/H46.2/W5.2 mm		End cover: D-JUK 4/10 Fixed bridge: JFBI 10-5 Insertion bridge : JEB 10-5 Marker strips: ZB5
137	Universal Terminal Blocks Color 	JUK 5N	800V/41A 0.2-6mm ² /0.2-4mm ² L42.5/H46.2/W6.2 mm		End cover: D-JUK 4/10 Fixed bridge: JFBI 10-6 Insertion bridge : JEB 10-6 Marker strips: ZB6
138	Universal Terminal Blocks Color 	JUK 6N	800V/57A 0.2-10mm ² /0.2-6mm ² L42.5/H46.2/W8.2 mm		End cover: D-JUK 4/10 Fixed bridge: JFBI 10-8 Insertion bridge : JEB 10-8 Marker strips: ZB8
139	Universal Terminal Blocks Color 	JUK 10N	800V/76A 0.5-16mm ² /0.5-10mm ² L42.5/H46.2/W10.2 mm		End cover: D-JUK 4/10 Fixed bridge: JFBI 10-10 Insertion bridge : JEB 10-10 Marker strips: ZB10
140	Universal Terminal Blocks Color 	JUK 16	800V/101A 2.5-25mm ² /4-16mm ² L42.5/H53/W12.2 mm		End cover: D-JUK 16 Fixed bridge: JFBI 10-12 Insertion bridge : JEB 10-12 Marker strips: ZB10
141	Universal Terminal Blocks Color 	JUK 25	800V/101A 2.5-35mm ² / 2.5-25mm ² L42.5/H46.2/W14.2 mm		End cover: D-JUK 4/10 Fixed bridge: JFBI 10-14 Marker strips: ZB10
142	Universal Terminal Blocks Color 	JUK 35	1000V/150A 0.75-50mm ² /0.75-35mm ² L51/H62/W15.2 mm		Fixed bridge: JFBI 10-15 Insertion bridge : JEB 10-15 Marker strips: ZB10
143	Installation Universal Terminal Blocks Color 	JUIK 16	800V/101A 0.25-25mm ² /4-16mm ² L42.5/H46.2/W12.2 mm		End cover: D-JUK 4/10 Fixed bridge: JFBI 10-12 Insertion bridge : JEB 10-12 Marker strips: ZB10
144	Installation Universal Terminal Blocks Color 	JUIK 35	800V/125A 0.75-35mm ² /0.75-35mm ² L56/H51/W15.2 mm		Fixed bridge: JFBI 10-15 Marker strip: ZB10
145	 Installation Universal Terminal Blocks (Hex Socket) Color 	JUT 35	1000V/125A 35mm ² L65.3/H60.9/W15.9 mm		Plug-in bridge: FBS 2-16 Marker strip: ZB 10
146	Ground Terminal Blocks (Hex Socket Screw)	JUT 35-PE	Launching Soon		
147	Universal Ground Terminal Blocks	JUSLKG 2.5N	0.2-4mm ² /0.2-2.5mm ² L42.5/H41/W6.2 mm		Marker strip: ZB6
148	Universal Ground Terminal Blocks	JUSLKG 3N	0.2-4mm ² /0.2-2.5mm ² L42.5/H46.2/W5.2 mm		Marker strip: ZB5
149	Universal Ground Terminal Blocks	JUSLKG 5N	0.2-6mm ² /0.2-4mm ² L42.5/H46/W6.2 mm		Marker strip: ZB6
150	Universal Ground Terminal Blocks	JUSLKG 6N	0.2-10mm ² /0.2-6mm ² L42.5/H46/W8.2 mm		Marker strip: ZB8
151	Universal Ground Terminal Blocks	JUSLKG 10N	0.5-16mm ² /0.5-10mm ² L42.5/H45/W10.2 mm		Marker strip: ZB10











152	Universal Ground Terminal Blocks	JUSLKG 16N	2.5-25mm ² /4-16mm ² L42.5/H53/W12.2 mm		Marker strip: ZB10
153	Universal Ground Terminal Blocks	JUSLKG 35	0.75-50mm ² /0.75-35mm ² L51/H61/W16.2 mm		Marker strip: ZB10
154	Universal Ground Terminal Blocks	JUISLKG 16	2.5-25mm ² /4-16mm ² L42.5/H46.2/W12.2 mm		Marker strip: ZB10
155	Universal Ground Terminal Blocks	JUISLKG 35	0.75-35mm ² /0.75-35mm ² L56/H50.2/W15.2mm		Marker strip: ZB10
156	Universal Ground Terminal Blocks	JUSLKG 50	16-50mm ² /25-50mm ² L71.2/H77/W20 mm		Marker strip: ZB10
157	Universal High-current Terminal Block Color 	JUKH 50	1000V/150A 16-50mm ² /25-50mm ² L71.5/H72/W20 mm		Fixed bridge: JFBI 2-20, 3-20 Marker strip: ZB10
158	Universal High-current Terminal Block Color 	JUKH 95	1000V/232A 25-95mm ² /35-95mm ² L83/H90.5/W25 mm		Insertion bridge: JEB2-25, JEB3-25 Marker strip: ZB10
159	Universal High-current Terminal Block Color 	JUKH 150	1000V/309A 35-150mm ² /50-150mm ² L101/H112/W31 mm		Insertion bridge: JEB2-31 Marker strip: ZB10
160	Universal High-current Terminal Block Color 	JUKH 240	1000V/415A 70-240mm ² /70-240mm ² L101/H126/W37 mm		Marker strip: ZB10
161	Twin Conductor Terminal Blocks	JUK-5TWIN	500V/32*A 0.2-4mm ² /0.2-4mm ² L50.5/H46.2/W6.2 mm		End cover: D-JUK 5-TWIN Fixed bridge: JFBI 10-6 Insertion bridge: JEB 10-6 Marker strips: ZB6
162	Double Terminal Blocks	JUDK 4	690V/32*A 0.2-4mm ² /0.2-4mm ² L64/H46.2/W6.2 mm		End cover: D-JUDK 4 Fixed bridge: JFBI 10-6 Insertion bridge: JEB 10-6 Marker strips: ZB6
163	 Double Terminal Blocks	JUDK 10	690V/57*A 0.2-16mm ² /0.2-10mm ² L64.9/H56.7/W10.2 mm		End cover: D-JUDK 4 Fixed bridge: JFBI 10-10 Insertion bridge: JEB 10-10 Marker strips: ZB10
164	Double Level Terminal Blocks Color 	JMBKKB 2.5	500V/32A 0.2-4mm ² /0.2-2.5mm ² L62.5/H47.5/W5.2 mm		End cover: D-JMBKKB 2.5 Fixed bridge: JFBRNI 10-5N Insertion bridge: JEB 10-5 Marker strips: ZB5
165	Double Level Terminal Blocks, with equipotential bonder Color 	JMBKKB 2.5-PV	500V/32A 0.2-4mm ² /0.2-2.5mm ² L62.5/H47.5/W5.2 mm		End cover: D-JMBKKB 2.5 Fixed bridge: JFBRNI 10-5N Insertion bridge: JEB 10-5 Marker strips: ZB5
166	Double Level Terminal Blocks	JUKKB 3	500V/32A 0.2-4mm ² /0.2-2.5mm ² L68/H62/W5.2 mm		End cover: D-JUKKB 3/5 Fixed bridge: JFBI 10-5 Insertion bridge: JEB 10-5 Marker strips: ZB5
167	Double Level Terminal Blocks	JUKKB 5	500V/32A 0.2-4mm ² /0.2-4mm ² L68/H62/W6.2 mm		End cover: D-JUKKB 3/5 Fixed bridge: JFBI 10-6 Insertion bridge: JEB 10-6 Marker strip: ZB 6
168	Double Level Terminal Blocks	JUKK 3	500V/32A 0.2-4mm ² /0.2-2.5mm ² L57/H62/W5.2 mm		End cover: D-JUKK 3/5 Fixed bridge: JFBI 10-5 Insertion bridge: JEB 10-5 Marker strip: ZB 5
169	Double Level Terminal Blocks	JUKK 5	500V/32A 0.2-4mm ² /0.2-4mm ² L57/H62/W6.2 mm		End cover: D-JUKK 3/5 Fixed bridge: JFBI 10-6 Insertion bridge: JEB 10-6 Marker strip: ZB 6
170	Double Level Terminal Blocks, with equipotential bonder	JUKK 5-PV	500V/32A 0.2-4mm ² /0.2-4mm ² L57/H62/W6.2 mm		End cover: D-JUKK 3/5 Fixed bridge: JFBI 10-6 Insertion bridge: JEB 10-6 Marker strip: ZB 6
171	Three Level Terminal Blocks	JDIKD 1.5	250V/30A 0.2-4mm ² /0.2-2.5mm ² L73/H54.5/W6.2 mm		Bridge: JEB 10-6, JFBI 10-6 80 seats bridge: EB 80- DIK, can be cut into different seats. Marker strip: ZB 6
172	Three Level Terminal Blocks, With equipotential bonder	JDIKD 1.5-PV	250V/30A 0.2-4mm ² /0.2-2.5mm ² L73/H54.5/W6.2 mm		Bridge: JEB 10-6, JFBI 10-6 80 seats bridge: EB 80- DIK, can be cut into different seats. Marker strip: ZB 6
173	Fuse Terminal Blocks With Disconnect Lever Color 	JUK 5-HESI (Grey)	800V/6.3A 0.2-4mm ² /0.2-4mm ² L73.5/H56.5/W8.2 mm		Insertion bridge: JEB 10-8 Marker strip: ZB 8 Extra fee for fuse: \$0.024 0.5, 1, 2, 3, 4, 5, 6, 8, 10A, etc

174	Fuse Terminal Blocks With Disconnect Lever Color  	JUK 5-HESI (Black)	800V/6.3A 0.2-4mm ² /0.2-4mm ² L73.5/H56.5/W8.2 mm		Insertion bridge: JEB 10-8 Marker strip: ZB 8 Extra fee for fuse: \$0.024 0.5, 1, 2, 3, 4, 5, 6, 8, 10A, etc
175	Fuse Terminal Blocks With Disconnect Lever with LED Color  	JUK 5-HESILED Grey/Black	800V/6.3A 0.2-4mm ² /0.2-4mm ² L73.5/H56.5/W8.2 mm		Insertion bridge: JEB 10-8 Marker strip: ZB 8 With LED Light: 220V, 24V Extra fee for fuse: \$0.024
176	 Fuse Terminal Blocks With Screw Cap Color  	JUK 10-DREHSI	800V/10A 0.5-16mm ² /0.5-16mm ² L62.5/H56.5/W12mm		Fixed bridge: JFBI 10-12 Marker strip: ZB 8 Extra fee for fuse: \$0.024 /pc 0.5, 1, 2, 3, 4, 5, 6, 8, 10A, etc
177	 Fuse Terminal Blocks With Screw Cap, with LED Color  	JUK 10-DREHSILED	800V/10A 0.5-16mm ² /0.5-16mm ² L62.5/H56.5/W12mm		Fixed bridge: JFBI 10-12 Marker strip: ZB 8 With LED Light: 220V, 24V Extra fee for fuse: \$0.024
178	Knife Disconnect Terminal Blocks	JUK 5-MTK P/P	500V/20A 0.2-4mm ² /0.2-4mm ² L51/H46.5/W6.2mm		Insertion bridge: JEB 10-6 Marker strip: ZB 6
179	Knife Disconnect Terminal Blocks	JUDK4-MTK	500V/20A 0.2-6mm ² /0.2-4mm ² L64/H46.2/W6.2 mm		End cover: D-JUDK 4 Insertion bridge: JEB 10-6 Marker strips: ZB6
180	Simple Test Disconnect Terminal Blocks	JERTK/S	400V/57A 0.5-10mm ² /0.5-6mm ² L72.5/H51/W8.2mm		End cover: D-JURTK Fixed bridge: JFBI 10-RTK/S Insertion bridge: JEB 10-8 Marker strip: ZB 8
181	Simple Test Disconnect Terminal Blocks	JURTK/S	400V/57A 0.5-10mm ² /0.5-6mm ² L72.5/H51/W8.2mm		End cover: D-JURTK Fixed bridge: JFBI 10-RTK/S Insertion bridge: JEB 10-8 Marker strip: ZB 8
182	 Screw Terminal Block For 15mm DIN Rail	JMBK3/E-Z	500V/32A 2.5mm ² L30.2/H26.6/W5.2mm		End cover: D-JMBK3/E Fixed bridge: JFBRNI 10-5N Marker strip: ZB 5
183	End cover	D-JMBK/E	L30.2/H26.1/W1mm		Match with: JMBK3/E-Z
184	Marker Carrier	JKLM-A	L46/H38/W9.5mm		Match with: E/JUK, E/JUK-2
185	Marker Carrier	JB1	L45/H47/W9.5mm		For DIN Rail
186	Marker Carrier	JB2(JUBE/D)	L45/H45/W20mm		For DIN Rail
187	UK Separating Plates	TS-KK3	L16/H14/W1mm		For JUK 2.5B
188	TS-K	TS-K	L22/H22.5/W1mm		For most types UK models
189	Partition Plate	ATP-JUK	L57.5/H47/W1.5mm		For UK series Only
190	End Cover	D-JUK 1.5	L42.5/H31/W1.5mm		Match with terminal block: JUK 1.5N
191	End Cover	D-JUK 2.5	L42.5/H31/W1.5mm		Match with terminal block: JUK 2.5B
192	End Cover	D-JUK 4/10	L42.5/H36.2/W1.8mm		Match with terminal block: JUK 3N, JUK 5N, JUK 6N JUK 10N, JUK 16
193	End Cover	D-JUK 16	L42.5/H43/W1.5mm		Match with terminal block: JUK 16
194	End Cover	D-JUK-5TWIN	L50.5/H34.5/W1.5		Match with terminal block: JUK-5TWIN
195	End Cover	D-JUDK4	L64/H36.2/W1.7		Match with terminal block: JUDK 4

196	End Cover	D-JUDK10	L63.5/H35.9/W1.5		Match with terminal block: JUDK 10
197	End Cover	D-JMBKKB 2.5	L62.5/H40/W2.6		Match with terminal block: JMBKKB 2.5
198	End Cover	D-JUKKB 3/5	L68/H52.2/W2.6 mm		Match with terminal block: JUKKB 3, JUKKB 5
199	End Cover	DP-JUKKB 3/5	L68/H25/W2.5 mm		Match with terminal block: JUKKB 3, JUKKB 5
200	End Cover	D-JUKK 3/5	L57/H52.2/W5 mm		Match with terminal block: JUKK 3, JUKK 5
201	End Cover	DP-JUKK 3/5	L57/H25/W2.5 mm		Match with terminal block: JUKK 3, JUKK 5
202	End Cover	D-JURTK/S	L72.5/H42/W1.7 mm		Match with terminal block: JURTK/S
203	Fixed Bridge	JFBRNI 10-5N	L41.8/H10/W4.7 mm		For JMBKKB 2.5 Can cut into different seats
204	Fixed Bridge	JFBI 10-4	L41.8/H10/W4.7 mm		For JUK 1.5N Can cut into different seats
205	Fixed Bridge, 10 seats	JFBI 10-5	L51.2/H15.8/W5 mm		For JUK 3N,
206	Fixed Bridge, 2 seats	JFBI 2-5	L10.3/H15.8/W5 mm		
207	Fixed Bridge, 3 seats	JFBI 3-5	L15.4/H15.8/W5 mm		
208	Fixed Bridge, 4 seats	JFBI 4-5	L20.4/H15.8/W5 mm		
209	Fixed Bridge, 10 seats	JFBI 10-6	L59.8/H9.5/W5.9 mm		For JUK 2.5B, JUK 5N JUDK 4
210	Fixed Bridge, 2 seats	JFBI 2-6	L10.6/H9.5/W5.9 mm		
211	Fixed Bridge, 3 seats	JFBI 3-6	L16.9/H9.5/W5.9 mm		
212	Fixed Bridge, 4 seats	JFBI 4-6	L23/H9.5/W5.9 mm		
213	Fixed Bridge, 10 seats	JFBI 10-8	L80.7/H7.7/W6.7 mm		For JUK 6N,
214	Fixed Bridge, 2 seats	JFBI 2-8	L14/H7.7/W6.7 mm		
215	Fixed Bridge, 3 seats	JFBI 3-8	L22.2/H7.7/W6.7 mm		
216	Fixed Bridge, 4 seats	JFBI 4-8	L30.5/H7.7/W6.7 mm		
217	Fixed Bridge	JFBI 10-10	L99.5/H7.8/W7.9 mm		For JUK 10N, Can cut into different seats
218	Fixed Bridge	JFBI 10-12	L116.5/H8.0/W7.9 mm		For JUK 16, JUIK16 Can cut into different seats
219	Fixed Bridge	JFBI 10-14			For JUK 25 Can cut into different seats
220	Fixed Bridge	JFBI 10-15	L148/H12/W10.9 mm		For JUK 35, JUIK 35 Can cut into different seats
221		JFBI 2-15	L26.3/H12/W10.9 mm		
222		JFBI 3-15	L41.5/H12/W10.9 mm		
223	Fixed Bridge	JFBI 2-20	L36.6/H13.3/W13.8 mm		For JUKH 50
224	Fixed Bridge	JFBI 3-20	L57.4/H13/W14 mm		For JUKH 50
225	Fixed Bridge	JFBI 10-RTK/S	L79.3/H10.1/W3.5 mm		For JURTK/S Can cut into different seats
226	Insertion Bridge	JEB 10-5	L51/H20.8 mm		For JUK 3N,
227		JEB 2-5	L10/H20.8 mm		
228		JEB 3-5	L12.6/H20.8 mm		
229		JEB 4-5	L17.8/H20.8 mm		
230	Insertion Bridge	JEB 10-6	L61/H22 mm		For JUK 2.5B, JUK 5N,
231		JEB 2-6	L10.3/H22 mm		
232		JEB 3-6	L16.7/H22 mm		
233		JEB 4-6	L23/H22 mm		
234	Insertion Bridge	JEB 10-8	L80.1/H24.9 mm		For JUK 6N,
235		JEB 2-8	L13.6/H24.9 mm		
236		JEB 3-8	L21.2/H24.9 mm		
237	Insertion Bridge	JEB 10-10	L98.7/H28.1 mm		For JUK 10N,
238		JEB 3-10	L26.8/H28.1 mm		
239		JEB 2-10	L12.8/H28.1 mm		

240	Insertion Bridge	JEB10-12			For JUK 16, JUIK16
241	Insertion Bridge	JEB 10-15			For JUK 35, JUIK 35
242	Insertion Bridge	JEB 2-25			For JUKH 95
243		JEB 3-25			
244	Insertion Bridge	JEB 2-31			For JUKH 150
245	Insertion Bridge for JDIKD 1.5 80 Seats, can cut into different seats Color 	JEB 80-DIK	H10.9mm x 3.6		\$0.113 for 1 seat, apply from 2 seats ~ 80 seats
246	Blank Marker Strips Unit price for 10 seats/strip (Suitable for JPT, JUK, JST Series)	ZB 3.5			For JPT series, 1.5mm ² For 1.5, 2.5, 4mm ² JST/JPT side
247		ZBFM 3.5, ZBFM 5, ZBFM 6			For thickness 4.2mm
248		ZB 4	Lettering field : 4.5x8.5mm		For thickness 5.2mm
249		ZB 5	Lettering field : 4.7*10.5mm		For thickness 6.2mm
250		ZB 6	Lettering field : 6*10.5mm		For thickness 8.2mm
251		ZB 8	Lettering field : 7.2*10.4mm		For thickness 10.2mm
252		ZB10	Lettering field : 9.3*10.7mm		
253	Marker Strips with numbering: 1-10,11-20,...,91-100 Unit price for 10 seats/strip (Suitable for JPT, JUK, JST Series)	ZB 3.5			For JPT series, 1.5mm ² For 1.5, 2.5, 4mm ² JST/JPT side
254		ZBFM 3.5, ZBFM 5, ZBFM 6			For thickness 4.2mm
255		ZB 4	Lettering field : 4.5x8.5mm		For thickness 5.2mm
256		ZB 5	Lettering field : 4.7*10.5mm		For thickness 6.2mm
257		ZB 6	Lettering field : 6*10.5mm		For thickness 8.2mm
258		ZB 8	Lettering field : 7.2*10.4mm		For thickness 10.2mm
259		ZB 10	Lettering field : 9.3*10.7mm		
260	Marker Strips with customized numbering	ZB 3.5		With customized wording	For 1.5, 2.5, 4mm ² JST/JPT side
261	Unit price for 10 seats/strip (Suitable for JPT, JUK, JST Series)	ZBFM 3.5, ZBFM 5, ZBFM 6			
262		ZB 4 . 5 . 6 . 8 . 10			




263	Spring-cage Terminal Blocks	280-101	800V/24A 0.08-2.5mm ² L42/H35.5/W5 mm		End cover: 280-301 Adjacent bridge: 280-402 Alternate bridge: 280-409 Marker strip: WSB
264	Spring-cage Ground Terminal Blocks	280-107	800V/24A 0.08-2.5mm ² L42/H35/W5 mm		End cover: 280-301 Marker strip: WSB
265	Spring-cage Terminal Blocks	281-101	800V/32A 0.08-4mm ² L42/H37.5/W6 mm		End cover: 281-301 Adjacent bridge: 281-402 Alternate bridge: 281-409 Marker strip: WSB
266	Spring-cage Ground Terminal Blocks	281-107	800V/32A 0.08-4mm ² L45/H40/W6 mm		End cover: 281-301 Marker strip: WSB
267	Spring-cage Terminal Blocks	282-101	800V/41A 0.2-6mm ² L46.2/H42/W8 mm		End cover: 282-301 Adjacent bridge: 282-402 Marker strip: WSB
268	Mini Terminal Blocks	260-301	400V/18A 0.08-1.5mm ² L25.5/H17.5/W5 mm		End cover: 260-361 Bridge: 260-402
269	Mini Terminal Blocks	261-301	500V/24A 0.08-2.5mm ² L28.3/H18.2/W6 mm		End cover: 261-361 Bridge: 261-402 Another type 261-301-M use with marker strip "DEK 6 "
270	Mini Terminal Blocks (Four conductor)	261-331	500V/24A 0.08-2.5mm ² L33.5/H23.2/W12 mm		End cover: 261-361 Bridge: 261-402
271	Mini Terminal Blocks	262-301	630V/24A 0.08-4mm ² L33.5/H23.2/W7 mm		End cover: 262-361 Bridge: 262-402
272	End Cover for Mini Terminal Blocks	260-361	L25.5/H17.5/W2.5 mm		For 260-301






















273	End Cover for Mini Terminal Blocks	261-361	L28.3/H18.2/W6 mm		For 261-301 261-331
274	End Cover for Mini Terminal Blocks	262-361	L33.5/H23.2/W7 mm		For 262-301
275	Mini Terminal Blocks	260-301B	400V/18A 0.08-1.5mm ² L25.2/H22/W5 mm		End cover: 260-361B
276	Mini Terminal Blocks	261-301B	500V/24A 0.08-2.5mm ² L28.2/H23/W6 mm		End cover: 261-361B Marker strip: DEK 6
277	End Cover for Mini Terminal Blocks	260-361B	L25.5/H22/W2.5 mm		For 260-301B
278	End Cover for Mini Terminal Blocks	261-361B	L28.3/H23/W2.5 mm		For 261-301B
279	Mounting Foot With Screw	209-123	L42/H11 mm		Holder for 260,261,262 series
280	Bridge	260-402			For 260-301
281		261-402			For 261-301
282		262-402			For 262-301
283	End Cover	280-301	L42/H30.5/W2.2 mm		Match with terminal block: 280-101
284	End Cover	281-301	L40/H32.5/W3 mm		Match with terminal block: 281-101
285	End Cover	282-301	L46.2/H37/W4 mm		Match with terminal block: 282-101
286	Adjacent Bridge	W279-402			For 279 series
287	Adjacent Bridge	W280-402	L8.1/H21.8/W5.0 mm		For 280 series
288	Alternate Bridge	W280-409	L10/H22.2/W8.3 mm		
289	Adjacent Bridge	W281-402	L6.1/H24.1/W8.4 mm		For 281 series
290	Alternate Bridge	W281-409	L12/H24.2/W8.2 mm		
291	Adjacent Bridge	W282-402	L8.0/H25.2/W8.4 mm		For 282 series
292	Adjacent Bridge	W284-402	L9.5/H25.5/W9.1 mm		For 284 series
293	Blank Marker Strips Unit price for 10 seats	WSB	Lettering field : 4.6x9 mm		For all Wago Series
294	Marker Strips with numbering: 1-10,11-20,...,91-100 Unit price for 10 seats	WSB	Lettering field : 4.6x9 mm		
295	Marker Strips with customized numbering, Unit price for 10 seats	WSB	Lettering field : 4.6x9 mm		



JSAK Series, Screw Connection Terminal Block
1. Standard color: Beige, Blue, Gray(JXB Series).
2. Other color and Logo can be customized.
3. Products can be made with Diode.



296	Universal Terminal Blocks Color 	JSAK 2.5EN	800V/24A Cross section: 2.5mm ² L41/H41/W6 mm		End cover: AP-2.5 Fixed bridge: JSAK 2.5 Q10 Marker strip: DEK 6
297	Universal Terminal Blocks Color 	JSAK 4EN	800V/32A Cross section: 4mm ² L42/H46.5/W6.5 mm		End cover: AP 4/10 Fixed bridge: JSAK 4 Q10 Marker strip: DEK 6
298	Universal Terminal Blocks Color 	JSAK 6EN	800V/41A Cross section: 6mm ² L42/H46.5/W8 mm		End cover: AP 4/10 Fixed bridge: JSAK 6 Q10 Marker strip: DEK 6
299	Universal Terminal Blocks Color 	JSAK 10EN	800V/57A Cross section: 10mm ² L42/H46.5/W10 mm		End cover: AP 4/10 Fixed bridge: JSAK 10 Q10 Marker strip: DEK 6
300	Universal Terminal Blocks Color 	JSAK 16EN	800V/76A Cross section: 16mm ² L50/H51.5/W12 mm		End cover: AP 16 Fixed bridge: JSAK 16 Q10 Marker strip: DEK 6
301	Universal Terminal Blocks Color 	JSAK 25EN	800V/76A Cross section: 25mm ² L50/H53/W20 mm		End cover: AP 16 Marker strip: DEK 6
302	Universal Terminal Blocks Color 	JSAK 35EN	800V/125A Cross section: 35mm ² L58/H62/W18 mm		End cover: AP 35 Fixed bridge: JSAK 35 Q10 Marker strip: DEK 6
303	Universal Terminal Blocks Color 	JSAK 70/35	800V/192A Cross section: 70mm ² L76/H79/W22 mm		End cover: AP 70 Marker strip: DEK 6
304	Universal Terminal Blocks Color 	JDK 4Q/35	500V/32A Cross section: 4mm ² L55.5/H56/W6 mm		End cover: AP DK4Q Fixed bridge: JDK 4Q 10 Marker strip: DEK 6
305	Universal Terminal Blocks Color 	JDK 4QV/35	500V/32A Cross section: 4mm ² L55.5/H56/W7 mm		End cover: AP DK4Q Fixed bridge: JDK 4Q 10 Marker strip: DEK 6
306	Testing Terminal Blocks Color 	JWTL 6/1S	400V/41A Cross section: 6mm ² L66/H52/W8 mm		End cover: AP WTL 6/1 Fixed bridge: JSAK 6 Q10 Marker strip: DEK 6
307	Fuse Terminal Blocks Color 	JASK1 EN	660V/6.3A Cross section: 4mm ² L58.5/H42/W8 mm		End cover: AP ASK1 Marker strip: DEK 6 Extra fee for fuse: \$0.024 0.5, 1, 2, 3, 4, 5, 6, 8, 10A, etc
308	Fuse Terminal Blocks With LED Color 	JASK1 LD EN	660V/6.3A Cross section: 4mm ² L58.5/H42/W8 mm		End cover: AP ASK1 Marker strip: DEK 6 With light, 220V, 24V Extra fee for fuse: \$0.024
309	Universal Ground Terminal Blocks	JEK 2.5/35	Cross section: 2.5mm ² L57/H37/W6 mm		Marker strip: DEK 6
310	Universal Ground Terminal Blocks	JEK 4/35	Cross section: 4mm ² L57.5/H41/W6.5 mm		Marker strip: DEK 6
311	Universal Ground Terminal Blocks	JEK 6/35	Cross section: 6mm ² L57.5/H41/W8 mm		Marker strip: DEK 6
312	Universal Ground Terminal Blocks	JEK 10/35	Cross section: 10mm ² L57.5/H41/W10 mm		Marker strip: DEK 6
313	Universal Ground Terminal Blocks	JEK 16/35	Cross section: 16mm ² L58/H47/W12 mm		Marker strip: DEK 6
314	Universal Ground Terminal Blocks	JEK 35/35	Cross section: 35mm ² L59/H57/W16.2 mm		Marker strip: DEK 6
315	Marker Carrier Color 	JB1 Beige	Cross section: 4mm ² L45/41/H47/W9.5 mm		
316	End Cover, SAK Color 	AP-2.5	L40/H31.5/W1.5 mm		Match with terminal block: JSAK 2.5EN
317	End Cover, SAK Color 	AP 4/10	L40/H37.2/W1.5 mm		Match with terminal block: JSAK 4EN JSAK 6EN JSAK 10EN

318	End Cover, SAK Color 	AP 16	L50.5/H35/W1.7 mm		Match with terminal block: JSAK 16EN
319	End Cover, SAK Color 	AP 35	L59/H47/W1.9 mm		Match with terminal block: JSAK 35EN
320	End Cover, SAK Color 	AP 70	L71.5/H66.5/W2 mm		Match with terminal block: JSAK 70/35
321	End Cover, SAK Color 	AP DK4Q	L54.7/H40/W1.5 mm		Match with terminal block: JDK 4Q/35 JDK 4QV/35
322	End Cover, SAK Color 	AP WTL 6/1	L66/H36/W1.8 mm		Match with terminal block: JWTL 6/1S
323	End Cover, SAK Color 	AP ASK1	L52.4/H24/W1.5 mm		Match with terminal block: JASK1 EN
324	Fixed Bridge	JSAK 2.5Q 10	L59.2/H15.8 mm		For JSAK 2.5EN Can cut into different seats
325	Fixed Bridge	JSAK 4Q 10	L64.1/H21.9 mm		For JSAK 4EN Can cut into different seats
326	Fixed Bridge	JSAK 6Q 10	L77.1/H21.9 mm		For JSAK 6EN Can cut into different seats
327	Fixed Bridge	JSAK 10Q 10	L92/H21.9 mm		For JSAK 10EN Can cut into different seats
328	Fixed Bridge	JSAK 16Q 10	L116/H21.9 mm		For JSAK 16EN Can cut into different seats
329	Fixed Bridge	JSAK 35Q10	L173/H33.4 mm		For JSAK 35EN Can cut into different seats
330	Fixed Bridge	JSAK DK4Q10	L62/H10.6 mm		For JDK4Q/35, JDK4QV/35 Can cut into different seats
331	Blank Marker Strips Unit price for 10 seats	DEK 6	Lettering field : 5x6 mm		
332	Marker Strips with numbering: 1-10,11-20,...,91-100 Unit price for 10 seats	DEK 6	Lettering field : 5x6 mm		
333	Marker Strips with customized numbering, Unit price for 10 seats	DEK 6	Lettering field : 5x6 mm		


For all SAK Series







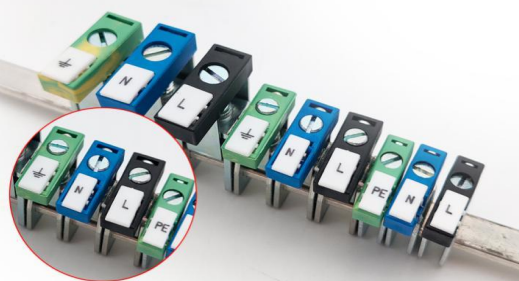


Busbar Connection Terminal Block

AKG4 0.5mm²-4mm²
AKG6 1.5mm²-16mm²
AKG35 2.5mm²-35mm²

Marker strips can be placed



334	Busbar Connection Terminal Block Blue,Black,Yellow/Green Marker Strip: ZB 5	AKG4	300V/41A 0.5-6mm ² /0.5-4mm ² For 3*10mm,6*6mm busbar		ZB 5
335	Busbar Connection Terminal Block Blue,Black,Yellow/Green Marker Strip: ZB 6	AKG16	300V/76A 1.5-16mm ² /1.5-16mm ² For 3*10mm,6*6mm busbar		ZB 6
336	Busbar Connection Terminal Block Blue,Black,Yellow/Green Marker Strip: ZB 8	AKG35	300V/125A 2.5-35mm ² /2.5-35mm ² For 3*10mm,6*6mm busbar		ZB 8
337	Tin Plated Neutral busbar	CU3*10	3*10mm, 1 Meter		Other size can be customized 
338	One Layer Holder for Busbar, clamp direct type	JAB/SS	Suitable for 3*10mm, 6*6mm busbar		


339	One Layer Holder for Busbar, screw tighten type	JAB/SS-2	Suitable for 3*10mm, 6*6mm busbar		
340	Double Layers Holder for Busbar	JAB/2SS	Suitable for 3*10mm, 6*6mm busbar		
341	Triple Layers Holder for Busbar	JAB/3SS	Suitable for 3*10mm, 6*6mm busbar		
34:	 <p>RAILS AND ACCESSORIES DIN Rails, Holders, End Clamps and End covers</p>				
343	Non-Oxide Plated Aluminum DIN Rail 15mm wide	NS 15-AL-1.3	Standard length: 1m Thickness 0.9mm		Material: Aluminum Surface: Non-Oxide Plated Can cut into different length
344	Non-Oxide Plated Aluminum DIN Rail	NS 35-AL-0.9	Standard length: 1m Thickness 0.9mm		Material: Aluminum Surface: Non-Oxide Plated Can cut into different length
345	Oxide Plated Aluminum DIN Rail	NS 35-AL-1.1	Standard length: 1m Thickness 1.1mm		Material: Aluminum Surface: Oxide Plated Can cut into different length
346		NS 35-AL-1.3	Standard length: 1m Thickness 1.2mm		
347		NS 35-AL-1.5	Standard length: 1m Thickness 1.5mm		
348	Color Galvanized Steel DIN Rail	NS 35-S-0.9	Standard length: 1m Thickness 0.9mm		Material: Steel Can cut into different length
349		NS 35-S-1.0	Standard length: 1m Thickness 1.0mm		
350	End Bracket/Stop	E/JUK	L43/H36/W9.5mm		Accessory: JKLM-A Marker Holder
351	End Bracket/Stop	E/JUK-2	L50/H35/W9.4mm		Accessory: JKLM-A Marker Holder
352	End Bracket/Stop Color 	JEW 35	L46.5/H31/W8.5 mm		Marker strip: DEK 6 For 35mm Wide DIN Rail
353	 Clamp Direct End Bracket/Stop	WKF15	L24.5/H22.8/W5.2 mm		For 15mm Wide DIN Rail
354	Thin Clamp Direct End Bracket/Stop	WKF35/S	L49.3/H35.5/W5.2 mm		For 35mm Wide DIN Rail
355	Clamp Direct End Bracket/Stop	WKF35	L47/H34/W9.5 mm		For 35mm Wide DIN Rail 
356	End Bracket/Stop	249-117	L43/H35/W10 mm		For 35mm Wide DIN Rail
357	Aluminum End Bracket/Stop	E-JAL	L58/H44/W10mm		
358	Galvanized Steel DIN Rail Clamp	E/FE-2	Can be fixed on the DIN Rail		
359	End cover for DIN Rail Black	NS 35HT-B	Cut Resistant		For 35mm DIN Rail 
360	End cover for DIN Rail Transparent	NS 35HT-T	Cut Resistant		
361	Steel DIN Rail Holder	TSTW	Thickness 2mm		Material: Steel









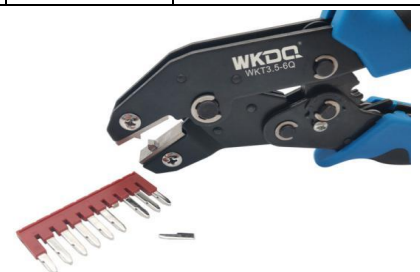



UKK/WKH Series
Power Distribution Box



362	Unipolar Distribution Box	UKK 80A	690V/80A 1 input 6 output L65/H47/W29.5 mm		Input: 1 x 16mm ² Output: 4 x 6mm ² 2 x 16mm ²
363	Unipolar Distribution Box	UKK 125A	690V/125A 1 input 6 output L74/H47/W29.4 mm		Input: 1 x 16mm ² 1 x 35mm ² Output: 6 x 16mm ²
364	Unipolar Distribution Box	UKK 160A	690V/160A 1 input 6 output L74/H47/W29.4 mm		Input: 1 x 70mm ² 1 x 16mm ² Output: 6 x 16mm ²
365	Unipolar Distribution Box	UKK 250A	690V/250A 1 input 11 output L96/H50/W47.8 mm		Input: 1 x 120mm ² Output: 2 x 35mm ² 5 x 16mm ² 4 x 10mm ²
366	Unipolar Distribution Box	UKK 400A	690V/400A 1 input 11 output L96/H50/W47.8 mm		Input: 1 x 185mm ² Output: 2 x 35mm ² 5 x 16mm ² 4 x 10mm ²
367	Unipolar Distribution Box	UKK 500A	690V/500A 1 input 11 output L96/H50/W47.8 mm		Input: 3 x 15mm ² 8 x 24mm ² Output: 2 x 35mm ² 5 x 16mm ² , 4 x 10mm ²
368	Unipolar Distribution Box	WKH-207	500V/125A Cross section: 35mm ² L67/H50/W45 mm		Hole Qty: 2 x 7 Brass Bar : 6.5 x 12mm
369	Unipolar Distribution Box	WKH-211	500V/125A Cross section: 35mm ² L100/H50/W45 mm		Hole Qty: 2 x 11 Brass Bar : 6.5 x 12mm
370	Unipolar Distribution Box	WKH-215	500V/125A Cross section: 35mm ² L134/H50/W45 mm		Hole Qty: 2 x 15 Brass Bar : 6.5 x 12mm
371	Unipolar Distribution Box	WKH-407	500V/125A Cross section: 35mm ² L67/H50/W90 mm		Hole Qty: 4 x 7 Brass Bar : 6.5 x 12mm
372	Unipolar Distribution Box	WKH-411	500V/125A Cross section: 35mm ² L100/H50/W90 mm		Hole Qty: 4 x 11 Brass Bar : 6.5 x 12mm
373	Unipolar Distribution Box	WKH-415	500V/125A Cross section: 35mm ² L134/H50/W90 mm		Hole Qty: 4 x 15 Brass Bar : 6.5 x 12mm
374	Unipolar Distribution Box	WKH-413	500V/160A Cross section: 35mm ² L180/H73/W138 mm		Hole Qty: 4 x 13 Brass Bar : 8 x 17mm
375	Unipolar Distribution Box	WKH-200A	500V/200A Cross section: 75mm ² L280/H115/W190 mm		Hole Qty: 4 x 11 Brass Bar : 4 x 15mm
376	Unipolar Distribution Box	WKH-250A	500V/250A Cross section: 100mm ² L280/H115/W190 mm		Hole Qty: 4 x 11 Brass Bar : 5 x 20mm
377	Unipolar Distribution Box	WKH-400A	500V/400A Cross section: 185mm ² L280/H115/W180 mm		Hole Qty: 4 x 10 Brass Bar : 6 x 25mm

Tools
WKC series
WKT series



378	VE Crimp Tool	WKC8 10-4	Square shape after crimped For cross section: 0.25-10mm ²		
379	VE Crimp Tool	WKC8 6-6	Hexagon shape after crimped For cross section: 0.25-6mm ²		
380	Cutting plier Tool Cut FBS accessories	WKT 3.5-6Q	Suitable for: FBS 10-3,5 FBS 10-4 FBS 10-5 FBS 10-6		
381	Cutting plier Tool Cut FBS accessories	WKT 6-10Q	Suitable for: FBS 10-6 FBS 10-8 FBS 10-10		
382	2.5*75 Slot Screw driver	WKT 2.5*75			
383	5*100 Slot Screw driver	WKT 5*100			
384	DIN Rail Cutter	WKT-NS02	Suitable for DIN Rail: NS 35-AL-1.5 NS 35-S-1.0		Other specification can be customized.
385	Automatic wire stripping and pressing machine	WKT2.5VE	Suitable for Solid wire 0.5-4mm ² Ferrules, soft wire 0.5-2.5mm ²		 




WHE Series Heavy Duty Connector
6-48 Side entry/Top entry
 -Water-proof, anti-rust and anti-corrosion
 -Silver-plated contacts



No.	PART NO.	Entry Side	Number of contact	A (mm)	B (mm)	C (mm)	E (mm)	F (mm)	G (mm)	d (mm)	Picture
-----	----------	------------	-------------------	--------	--------	--------	--------	--------	--------	--------	---------

Heavy-duty connector

Voltage/Current: 500V/16A
 Surface: Silver-plated
 Contact resistance: $\leq 1m\Omega$
 Cross section: 1.0-2.5mm² (AWG 18-14)
 Tightening torque: 0.5Nm
 Stripping length: 7mm

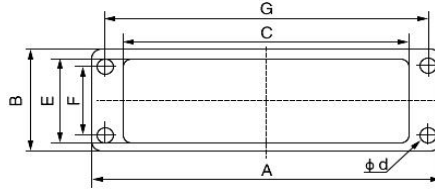

Panel Installation size:

With male/female insert

1	WHE06C	Side entry	6	80.0	43.0	52.2	35.0	32.0	70.0	4.3	
2	WHE06D	Top entry	6	80.0	43.0	52.2	35.0	32.0	70.0	4.3	
3	WHE10C	Side entry	10	93.0	43.0	65.2	35.0	32.0	83.0	4.3	
4	WHE10D	Top entry	10	93.0	43.0	65.2	35.0	32.0	83.0	4.3	
5	WHE16C	Side entry	16	113.0	43.0	85.5	35.0	32.0	103.0	4.3	
6	WHE16D	Top entry	16	113.0	43.0	85.5	35.0	32.0	103.0	4.3	
7	WHE24C	Side entry	24	140.0	43.0	112.2	35.0	32.0	130.0	4.3	
8	WHE24D	Top entry	24	140.0	43.0	112.2	35.0	32.0	130.0	4.3	
9	WHE32C	Side entry	32	113.0	80.5	86.0	73.0	60.0	103.0	4.5	
10	WHE32D	Top entry	32	113.0	80.5	86.0	73.0	60.0	103.0	4.5	
11	WHE48C	Side entry	48	140.0	80.5	113.0	73.0	60.0	130.0	4.5	
12	WHE48D	Top entry	48	140.0	80.5	113.0	73.0	60.0	130.0	4.5	

Heavy Duty Connector without SHELL

13	WHE06X	Male+Female	6	Insertion for WHE06C/WHE06D						
14	WHE10X	Male+Female	10	Insertion for WHE10C/WHE10D						
15	WHE16X	Male+Female	16	Insertion for WHE16C/WHE16D						
16	WHE24X	Male+Female	24	Insertion for WHE24C/WHE24D						
17	WHE32X	Male+Female	32	Insertion for WHE32C/WHE32D						
18	WHE48X	Male+Female	48	Insertion for WHE48C/WHE48D						




VE/TE Series Cold Terminal

The following colors are available



Other styles are available

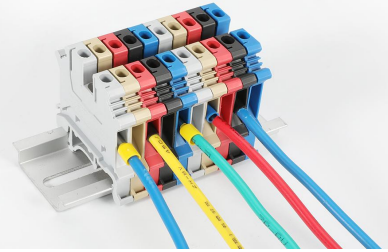

No.	PART NO.	Cross Section (mm ²)	L (mm)	F (mm)	W (mm)	D (mm)	C (mm)	package
-----	----------	----------------------------------	--------	--------	--------	--------	--------	---------

VE series cold pressed terminal block

Color as follows for your choice:



VE Brass+Nylon

1	VE0508-B	0.5mm ²	14.0	8.0	2.5	1.3	1.0	1000 pcs per bag
2	VE0510-B	0.5mm ²	16.0	10.0	2.5	1.3	1.0	1000 pcs per bag
3	VE0512-B	0.5mm ²	18.0	12.0	2.6	1.3	1.0	1000 pcs per bag
4	VE7508-B	0.75mm ²	14.6	8.0	2.8	1.5	1.2	1000 pcs per bag
5	VE7510-B	0.75mm ²	16.4	10.0	2.8	1.5	1.2	1000 pcs per bag
6	VE7512-B	0.75mm ²	18.4	12.0	2.8	1.5	1.2	1000 pcs per bag
7	VE1008-B	1.0mm ²	14.3	8.0	2.8	1.7	1.4	1000 pcs per bag
8	VE1010-B	1.0mm ²	16.3	10.0	3.0	1.7	1.4	1000 pcs per bag
9	VE1012-B	1.0mm ²	19.3	12.0	3.0	1.7	1.4	1000 pcs per bag
10	VE1508-B	1.5mm ²	14.6	8.0	3.5	2.0	1.7	1000 pcs per bag
11	VE1510-B	1.5mm ²	16.4	10.0	3.5	2.0	1.7	1000 pcs per bag
12	VE1512-B	1.5mm ²	18.4	12.0	3.5	2.0	1.7	1000 pcs per bag
13	VE2508-B	2.5mm ²	15.2	8.0	4.0	2.6	2.3	1000 pcs per bag
14	VE2510-B	2.5mm ²	17.2	10.0	4.0	2.6	2.3	1000 pcs per bag
15	VE2512-B	2.5mm ²	19.2	12.0	4.0	2.6	2.3	1000 pcs per bag
16	VE4009-B	4.0mm ²	16.5	9.0	4.4	3.2	2.8	1000 pcs per bag
17	VE4012-B	4.0mm ²	19.5	12.0	4.4	3.2	2.8	1000 pcs per bag
18	VE6010-B	6.0mm ²	18.0	10.0	6.3	3.9	3.5	1000 pcs per bag
19	VE6012-B	6.0mm ²	20	12	6.3	3.9	6.5	1000 pcs per bag
20	VE10-12-B	10mm ²	22	12	7.5	4.9	4.5	1000 pcs per bag
21	VE10-18-B	10mm ²	26	18	7.5	4.9	4.5	1000 pcs per bag
22	VE16-12-B	16mm ²	22	12	8.7	6	5.8	500 pcs per bag
23	VE16-18-B	16mm ²	28	18	8.7	6	5.8	500 pcs per bag
24	VE25-12-B	25mm ²	24	12	11	7.9	7.5	200 pcs per bag
25	VE25-16-B	25mm ²	28	16	11	7.9	7.5	200 pcs per bag
26	VE35-16-B	35mm ²	16	30	12.5	8.7	8.3	200 pcs per bag
27	VE50-20-B	50mm ²	20	36	16	10.9	10.3	100 pcs per bag

VE Red Copper+Nylon

1	VE0308-A	0.3mm ²	12.4	8.0	1.9	1.1	0.8	1000 pcs per bag
---	----------	--------------------	------	-----	-----	-----	-----	------------------


2	VE0508-A	0.5mm²	14.0	8.0	2.5	1.3	1.0	1000 pcs per bag
3	VE0510-A	0.5mm²	16.0	10.0	2.5	1.3	1.0	1000 pcs per bag
4	VE0512-A	0.5mm²	18.0	12.0	2.6	1.3	1.0	1000 pcs per bag
5	VE7508-A	0.75mm²	14.6	8.0	2.8	1.5	1.2	1000 pcs per bag
6	VE7510-A	0.75mm²	16.4	10.0	2.8	1.5	1.2	1000 pcs per bag
7	VE7512-A	0.75mm²	18.4	12.0	2.8	1.5	1.2	1000 pcs per bag
8	VE1008-A	1.0mm²	14.3	8.0	2.8	1.7	1.4	1000 pcs per bag
9	VE1010-A	1.0mm²	16.3	10.0	3.0	1.7	1.4	1000 pcs per bag
10	VE1012-A	1.0mm²	19.3	12.0	3.0	1.7	1.4	1000 pcs per bag
11	VE1508-A	1.5mm²	14.6	8.0	3.5	2.0	1.7	1000 pcs per bag
12	VE1510-A	1.5mm²	16.4	10.0	3.5	2.0	1.7	1000 pcs per bag
13	VE1512-A	1.5mm²	18.4	12.0	3.5	2.0	1.7	1000 pcs per bag
14	VE2508-A	2.5mm²	15.2	8.0	4.0	2.6	2.3	1000 pcs per bag
15	VE2510-A	2.5mm²	17.2	10.0	4.0	2.6	2.3	1000 pcs per bag
16	VE2512-A	2.5mm²	19.2	12.0	4.0	2.6	2.3	1000 pcs per bag
17	VE4009-A	4.0mm²	16.5	9.0	4.4	3.2	2.8	1000 pcs per bag
18	VE4012-A	4.0mm²	19.5	12.0	4.4	3.2	2.8	1000 pcs per bag
20	VE6010-A	6.0mm²	18.0	10.0	6.3	3.9	3.5	1000 pcs per bag
21	VE6012-A	6.0mm²	20	12	6.3	3.9	6.5	1000 pcs per bag
22	VE10-12-A	10mm²	22	12	7.5	4.9	4.5	1000 pcs per bag
23	VE10-18-A	10mm²	26	18	7.5	4.9	4.5	1000 pcs per bag
24	VE16-12-A	16mm²	22	12	8.7	6	5.8	500 pcs per bag
25	VE16-18-A	16mm²	28	18	8.7	6	5.8	500 pcs per bag
26	VE25-12-A	25mm²	24	12	11	7.9	7.5	200 pcs per bag
27	VE25-16-A	25mm²	28	16	11	7.9	7.5	200 pcs per bag
29	VE35-25-A	35mm²	25	30	12.5	8.7	8.3	200 pcs per bag
30	VE50-20-A	50mm²	20	36	16	10.9	10.3	100 pcs per bag

TE series Double Ferrule terminal block

Color as follows for your choice:



Red Copper+Nylon






































No.	PART NO.	Cross Section (mm ²)	L (mm)	F (mm)	W (mm)	B (mm)	D (mm)	C (mm)	package
1	TE0508-A	2*0.5	14.5	8.0	5.0	6.5	1.8	1.5	1000 pcs per bag
2	TE0510-A	2*0.5	16.5	10.0	5.0	6.5	1.8	1.5	1000 pcs per bag
3	TE0512-A	2*0.5	18.5	12.0	5.0	6.5	1.8	1.5	1000 pcs per bag
4	TE7508-A	2*0.75	14.7	8.0	5.5	6.7	2.1	1.8	1000 pcs per bag
5	TE7510-A	2*0.75	16.7	10.0	5.5	6.7	2.1	1.8	1000 pcs per bag
6	TE7512-A	2*0.75	18.7	12.0	5.5	6.7	2.1	1.8	1000 pcs per bag
7	TE1008-A	2*1.0	15.1	8.0	5.5	7.1	2.3	2.0	1000 pcs per bag
8	TE1010-A	2*1.0	17.1	10.0	5.5	7.1	2.3	2.0	1000 pcs per bag
9	TE1012-A	2*1.0	19.1	12.0	5.5	7.1	2.3	2.0	1000 pcs per bag
10	TE1508-A	2*1.5	15.5	8.0	6.4	7.2	2.6	2.3	1000 pcs per bag
11	TE1510-A	2*1.5	17.5	10.0	6.4	7.5	2.6	2.3	1000 pcs per bag
12	TE1512-A	2*1.5	19.5	12.0	6.4	7.5	2.6	2.3	1000 pcs per bag
13	TE2508-A	2*2.5	16.5	8.0	8.0	8.5	3.3	2.9	1000 pcs per bag
14	TE2510-A	2*2.5	18.5	10.0	8.0	8.5	3.3	2.9	1000 pcs per bag
15	TE2512-A	2*2.5	20.5	12.0	8.0	8.5	3.3	2.9	1000 pcs per bag
16	TE4012-A	2*4.0	23.1	12.0	8.8	11.1	4.2	3.8	1000 pcs per bag
17	TE6014-A	2*6.0	26.1	14.0	9.5	12.1	5.3	4.9	1000 pcs per bag
18	TE10-14-A	2*10	26.1	14.0	12.6	12.6	6.9	6.5	500 pcs per bag
19	TE16-14-A	2*16	31.3	14.0	19.0	17.3	8.7	8.3	200 pcs per bag

Available in more types:






No.	ITEM	PART NO.	DETAIL	PIC.	Remark
1	Push-in Connector	773-102	400V/24A Cross section:2.5mm ² L19.5/W13.1/H9.2 mm		Available in PC material
2	Push-in Connector	773-104	400V/24A Cross section:2.5mm ² L19.5/W13/H13.1 mm		Available in PC material
3	Push-in Connector	773-106	400V/24A Cross section:2.5mm ² L19.5/W18.8/H13.1 mm		Available in PC material
4	Push-in Connector	773-108	400V/24A Cross section:2.5mm ² L19.5/W24.2/H13.1 mm		Available in PC material
5	Push-in Connector	773-173	400V/24A Cross section:6mm ² L25.6/W20.1/H14.2 mm		Available in PC material
6	Push-in Connector	773-174	400V/32A Cross section:6mm ² L33.5/W20.1/H10.2 mm		
7	Push-in Connector	773-602	400V/32A Cross section:4mm ² L19.5/W13.1/H9.2 mm		
8	Push-in Connector	773-604	400V/32A Cross section:4mm ² L19.5/W13/H13.1 mm		
9	Push-in Connector	773-606	400V/32A Cross section:4mm ² L19.5/W18.8/H13.1 mm		
10	Push-in Connector	2273-202	450V24A Cross section:2.5mm ² L16.5/W10/H5.8mm		
11	Push-in Connector	2273-203	450V24A Cross section:2.5mm ² L16.5/W14/H5.8mm		
12	Push-in Connector	2273-204	450V24A Cross section:2.5mm ² L16.5/W18/H5.8mm		
13	Push-in Connector	2273-205	450V24A Cross section:2.5mm ² L16.5/W22/H5.8mm		
14	Push-in Connector	2273-206	450V24A Cross section:2.5mm ² L16.7/W14/H5.8mm		
15	Push-in Connector	2273-208	450V24A Cross section:2.5mm ² L16.7/W18/H5.8mm		
16	Compact splicing connector	221-412	400V/32A Cross section:4mm ² L19.1/W13.1/H9.9mm		Material: PC+PA66
17	Compact splicing connector	221-413	400V/32A Cross section:4mm ² L19.1/W18.6/H9.9mm		Material: PC+PA66
18	Compact splicing connector	221-414	400V/32A Cross section:4mm ² L19.1/W24.3/H9.9mm		Material: PC+PA66
19	Compact splicing connector	221-415	400V/32A Cross section:4mm ² L19.1/W29.9/H9.9mm		Material: PC+PA66

20	Compact splicing connector	221-662	450V/40A Cross section: 6mm ² L21.5/W15.6/H11mm		
21	Compact splicing connector	221-663	450V/40A Cross section: 6mm ² L21.5/W22.1/H11mm		
22	Compact splicing connector	221-664	Developing		
23	Compact splicing connector	221-665	450V/40A Cross section: 6mm ² L21.5/W35.1/H11mm		
24	Compact splicing connector	222-412	400V/32A Cross section:2.5mm ² L20.5/W12.4/H14.5 mm		Available in PC material 
25	Compact splicing connector	222-413	400V/32A Cross section:2.5mm ² L20.5/W17/H14.5 mm		Available in PC material 
26	Compact splicing connector	222-414	400V/32A Cross section:2.5mm ² L20.5/W20.85/H14.5 mm		Available in PC material
27	Compact splicing connector	222-415	400V/32A Cross section:2.5mm ² L20.5/W26.6/H14.5 mm		Available in PC material 
28	Compact splicing connector	222-418	400V/32A Cross section:2.5mm ² L20.5/W40 /H14.5mm		
29	Compact splicing connector	222-422	400V/32A Cross section:4mm ² L39/W13.5 /H14.5mm		Available in Colors handles 
30	Compact splicing connector	222-423	400V/32A Cross section:4mm ² L39.5/W18.6 /H14.5mm		
31	Compact splicing connector with DIN Rail Feet	222-211	400V/32A Cross section:4mm ² L43/W8/H31mm		
32	Compact splicing connector with DIN Rail Feet	222-212	400V/32A Cross section:4mm ² L43/W13/H31mm		
33	Compact splicing connector with DIN Rail Feet	222-213	400V/32A Cross section:4mm ² L43/W18/H31mm		
34	Compact splicing connector	222-P421	400V/32A Cross section:4mm ²		 Can joint together
35	Compact splicing connector	222-P422	400V/32A Cross section:4mm ²		 Can joint together
36	Compact splicing connector	222-P423	400V/32A Cross section:4mm ²		 Can joint together
37	Splicing connector	222-T11	0.08-4mm ²		
38	One input two out Splicing connector	222-F12	0.08-4mm ²		Other color: Grey Handle color: Orange, Blue, Yellow
39	One input three out Splicing connector	222-F13	0.08-4mm ²		Other color: Grey Handle color: Orange, Blue, Yellow
40	One input four out Splicing connector	222-F14	0.08-4mm ²		Other color: Grey Handle color: Orange, Blue, Yellow
41	One input five out Splicing connector	222-F15	0.08-4mm ²		Other color: Grey Handle color: Orange, Blue, Yellow
42	Two input four out Splicing connector (Assembled from 2 pcs 222-F12)	222-F24	0.08-4mm ²		Other color: Grey

43	Two input six out Splicing connector (Assembled from 2 pcs 222-F13)	222-F26	0.08-4mm2		Other color: Grey
44	Two input eight out Splicing connector (Assembled from 2 pcs 222-F14)	222-F28	0.08-4mm2		Other color: Grey
45	Two input ten out Splicing connector (Assembled from 2 pcs 222-F15)	222-F210	0.08-4mm2		Other color: Grey
46	Three input six out Splicing connector (Assembled from 3 pcs 222-F12)	222-F36	0.08-4mm2		Other color: Grey
47	Three input nine out Splicing connector (Assembled from 3 pcs 222-F13)	222-F39	0.08-4mm2		Other color: Grey
48	Push-in Connector	FCT-252	L19.5/W11/H10mm		
49	Push-in Connector	FCT-253	L20/W14.3/H9.8mm		
50	Push-in Connector	FCT-254	L20/W17.5/H9.8mm		
51	Push-in Connector	FCT-255	L19.5/W21.5/H9.8mm		
52	Lighting connector	224-101	400V/24A Cross section:2.5mm ² L20.5/W8.5/H15.5 mm		Available in PC material 
53	Lighting connector	224-112	400V/24A Cross section:2.5mm ² L20.5/W10/H15.5 mm		Available in PC material 
54	Lighting connector	224-201	400V/24A Cross section:2.5mm ² L42/W8.5/H15.5 mm		Available in PC material 
55	Mounting Carrier for 222 series	222-500	L66/W26 mm		
56	Mounting Carrier with Strain relief plate for 222 series	222-500+222-505	L67.5/W52 mm		
57	Mounting Carrier for 773 series	773-322	L66/W26 mm		
58	Mounting Carrier with Strain relief plate for 773 series	773-322+222-505	L67.5/W52 mm		
59	Strain relief plate	222-505	L67.5/W52 mm		
60	Carrier for fixing on panel	222-41	For 222-412, 222-413, 222-414, 222-415, 222-418		
61	Carrier for fixing on panel	222-42	Carrier for 222-422, 222-423		
62	DIN Rail Carrier	222-K41	For 222-412, 222-413, 222-414, 222-415, 222-418		
63	DIN Rail Carrier	222-K42	Carrier for 222-P421		
64	DIN Rail Carrier	222-Z43	For 222-T11 F12 F13 F14 F15 P421 P422 P423		

Fan filter
Cabinet ventilation system
230VAC 240VAC



No.	ITEM	PART NO.	DETAIL	PIC.	REF.
-----	------	----------	--------	------	------

**Cabinet Fan and Filters, standard color RAL7032, can custom make RAL7035.
OEM service is supported**

1	Air Filter Panel	3321-300	Installation size: 92x92 mm		Surface size:116.5x116.5 mm For 92mm Fan IP54
2	Fan and Filter	3321-230	Installation size: 92x92 mm		Surface size:116.5x116.5 mm Equipe with Fan size: 92x92x25 mm IP54
3	Air Filter Panel	3322-300	Installation size: 124x124 mm		Surface size:148.5x148.5 mm For 120mm fan IP54
4	Fan and Filter 230V, 110V	3322-230	Installation size: 124x124 mm		Surface size:148.5x148.5 mm Equipe with Fan size: 120x120x38 mm IP54
5	Air Filter Panel	3323-300	Installation size: 177x177 mm		Surface size:204x204 mm For 120mm fan IP54
6	Fan and Filter 230V, 110V	3323-230	Installation size: 177x177 mm		Surface size:204x204 mm Equipe with Fan size: 120x120x38 mm IP54
7	Air Filter Panel	3325-300	Installation size: 224x224 mm		Surface size:255x255 mm For 172mmfan IP54
8	Fan and Filter 230V, 110V	3325-230	Installation size: 224x224 mm		Surface size:255x255 mm Equipe with Fan size: 172x150x51 mm IP54
9	Air Filter Panel	3326-300	Installation size: 290x290 mm		Surface size:320x320 mm For 225mm fan IP54
10	Fan and Filter 230V, 110V	3326-230	Installation size: 290x290 mm		Surface size: 320x320 mm Equipe with Fan size: 225x225x80mm IP54
11	Air Filter Panel with Rubber seal	9803-300	Installation size: 122x122 mm		Surface size: 148.5x148.5 mm For 120mm Fan IP54
12	Fan and Filter with Rubber seal 230V, 110V	9803-230	Installation size: 122x122 mm		Surface size: 148.5x148.5 mm Equipe with Fan size: 120x120x38 mm IP54
13	Air Filter Panel with Rubber seal	9804-300	Installation size: 175x175 mm		Surface size: 204x204 mm For 172mm fan IP54
14	Fan and Filter with Rubber seal 230V, 110V	9804-230	Installation size: 175x175 mm		Surface size:204x204 mm Equipe with Fan size: 172x150x51 mm IP54
15	Air Filter Panel with Rubber seal	9805-300	Installation size: 223x223 mm		Surface size:255x255 mm For 172mm fan IP54
16	Fan and Filter with Rubber seal 230V, 110V	9805-230	Installation size: 223x223 mm		Surface size: 255x255 mm Equipe with Fan size: 172x150x51 mm IP54
17	Air Filter Panel with Rubber seal	9806-300	Installation size: 283x283 mm		Surface size: 320x320 mm IP54